

08-11-00

A/.

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
428291/014

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**CORRUGATING MACHINE AND CORRUGATING ROLL DESIGN FOR THE SAME**

and invented by:

Etsuro Abe

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 22 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
428291/014

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 7
- b. ☐ Informal Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL 549 036 171 US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
428291/014

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	9	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$760.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-4709 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$760.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 8/10/2000

*Lawrence Rosenthal*  
Signature  
Lawrence Rosenthal  
Reg. No. 24,377  
STROOCK & STROOCK & LAVAN LLP  
180 Maiden Lane  
New York, New York 10038  
(212) 806-5400

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**

Applicant(s): Etsuro Abe

Docket No.

428291/014

Serial No.  
New ApplicationFiling Date  
Herewith

Examiner

Group Art Unit

Invention: CORRUGATING MACHINE AND CORRUGATING ROLL DESIGN FOR THE SAME

I hereby certify that the following correspondence:

Utility Patent Application Transmittal; specification (22 pages); executed Declaration (3 pages); seven sheets of formal drawings; Com. Filing Priority Documents and one priority document; IDS; PTO 1449 and 1 reference executed Assignment and cover sheet

*(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

8/10/00*(Date)*Patricia Driscoll*(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)*EL 549 036 171 US*("Express Mail" Mailing Label Number)*

Note: Each paper must have its own certificate of mailing.

APPLICATION OF

ETSURO ABE

FOR LETTERS PATENT OF THE UNITED STATES

FOR IMPROVEMENTS IN

CORRUGATING MACHINE AND CORRUGATING  
ROLL DESIGN FOR THE SAME

Lawrence Rosenthal  
Registration No. 24,377  
Attorney for Applicants  
Stroock & Stroock & Lavan LLP  
180 Maiden Lane  
New York, New York 10038  
(212) 806-5400

Docket No. 428291/014

Express Mail Number: EL 549 036 171 US  
Date of Deposit: August 10, 2000

I hereby certify that this paper or fee is being deposited  
with the United States Postal Service "Express Mail Post  
Office to Addressee" service under 37 C.F.R. 1.10 on the  
date indicated above and is addressed to: *Commissioner for  
Patents, Washington, D.C. 20231.*

Name: Patricia Driscoll

Signature: *Patricia Driscoll*

# CORRUGATING MACHINE AND CORRUGATING ROLL DESIGN FOR THE SAME

## BACKGROUND OF THE INVENTION

5

The present invention relates to a corrugating machine utilized in the manufacture of corrugated cardboards or paperboards and a corrugating roll design for use with the machine.

10

An example of a conventional "single facer" corrugating machine for making a single faced corrugated cardboard is generally shown at 100 in Figure 5. The single facer 100 generally comprises corrugating rolls consisting of a pair of upper and lower, counter-rotating, longitudinally toothed, corrugating rolls 110a and 110b for providing corrugations or flutes in a paper medium or core A in a nip 160 created between the rolls 110a and 110b, a gluing section 120 for applying glue or adhesive to the tops of the flutes of the corrugated medium A as it is moved therepast, and a smooth surfaced pressure roll 130 disposed downstream of the gluing section for cooperating with the lower toothed roll 110b to bond the glued corrugated paper medium A and a paper liner B to each other to form a single faced corrugated cardboard product C. Each of the upper and lower corrugating rolls 110a and 110b has a tooth profile 140 defined by a plurality of tooth roots or bottom lands and a plurality of tooth tips extending longitudinally along the outer peripheral surface of the roll. Suction device 150 is disposed adjacent to the lower corrugating roll 110b to hold the corrugated medium A against the lower toothed roll 110b by suction.

15

20

25

In the conventional corrugating process using the single facer 100, a paper medium web is passed into the nip 160 formed by the inter-engaging teeth of the two corrugating rolls 110a and 110b, and this web begins to be deformed as it moves into an actual corrugating impression zone P in the nip where full engagement of the teeth takes place, i.e., one of the tooth tips of the upper roll 110a and the corresponding one of tooth roots of the lower roll 110b are in registration or in impression engagement. At the corrugating impression zone P, the medium web is formed into a final corrugated configuration as shown in Figure 6. The corrugated medium A, after passing through the nip, is transferred to a glue applicator roll 170 of the gluing section 120 while being held by suction or vacuum against the lower corrugating roll 110b. Such transfer of the corrugated medium web can be accomplished by rotation of the lower corrugating roll 110b. The gluing section 120 picks up the glue contained in a glue reservoir 190 while rotating within the reservoir to be partially immersed in the glue therein, and applies the glue to the tops of the corrugations of the paper medium A. Doctor roll 180 is used to perform glue layer thickness control and provide for the application of a uniform glue layer to the tops of the corrugations of the medium A. The glued medium A is next passed between the lower corrugating roll 110b and the pressure roll 130 along with the liner B being carried around a portion of the pressure roll 130. The pressure roll 130 presses the glued corrugated medium A and the liner B against the lower corrugating roll 110b to bond the materials A and B to each other and thus produce a single faced corrugated cardboard paper product C.

The conventional design of the single facer 100 has the

following disadvantages when used in the manufacture of the single faced corrugated cardboards.

Firstly, in order to ensure that the paper medium can be formed with the industrial standard type flutes and to prevent spring back of the fluted paper medium after it leaves the corrugating nip, it is required to provide a significant corrugating nip pressure between the pair of the corrugating rolls 110a and 110b at the corrugating impression zone P, the amount of which pressure is determined in accordance with a given center-to-center distance of the upper and lower corrugating rolls 110a and 110b. More specifically, the medium web can be clamped by the substantial corrugating nip pressure provided between one of the tooth tips 152 of the upper corrugating roll 110a and one of tooth roots 151 of the lower corrugating roll 110b, as shown in Figure 7.

Paper tensile strength may depend mainly on frictional forces acting among the fibers of the paper medium and a degree of fiber entanglement. The fibers in the paper medium tend to be generally oriented in a direction perpendicular to the length of the roll as the paper medium moves through the corrugating nip.

Application of substantial nip load to the medium at the corrugating nip position P may cause some of the fibers in the portion of the medium being corrugated to be cut, thereby resulting in a decrease of the degree of fiber entanglement. This may lead to a reduction strength or rupture of the corrugated paper medium and a decrease in the quality of the product.

Secondly, in order to handle a higher corrugating speed, the liner B is brought into contact with only the tops of the glued flutes of the paper medium A between the lower corrugating roll 110b and the pressure roll 130. In this case, the glue cannot



fully penetrate into both of the medium A and the liner B. Thus, bonding may occur at interfaces between the liner B and the tops of the flutes of the medium A in which some of the fibers therein may be cut undesirably, thus resulting in reduction of the bonding strength and also reduction of the strength of the single faced corrugated cardboard product in the form of a trussed structure composed of the combined corrugated medium A and liner B.

To overcome the second disadvantage, Japanese Laid Open Patent Application No. 8-25531 proposes a pair of upper and lower corrugating rolls for a single facer wherein the corrugating rolls, instead of each having a tooth profile composed of a single arc, each have a profile of a tooth tip portion defined by a combination of a plurality of arcs that are symmetrical with respect to its center line. The tooth tip portion of each of the corrugating roll has a gentle arc form that has no abrupt change in curvature. With this arrangement, a substantially uniform distribution of contact pressure exerted on the liner and paper medium webs can be accomplished as they are compressed between the pressure roll and the lower corrugating roll.

As can be appreciated, however, the pressure roll has a smooth cylindrical surface whereas the lower and upper corrugating rolls have their tooth profiles. Accordingly, application of the teachings of the 8-25531 application to the pair of upper and lower corrugating rolls defining the corrugating nip therebetween would not prevent the loss of the strength of the paper corrugated medium because of the cut fibers mentioned above with regard to said second disadvantage. Moreover, modification of the corrugating roll design having the tooth profile composed of a single arc into that having the tooth

profile defined by the combination of the plurality of arcs mentioned above may require delicate machining operations.

Also, for overcoming the problem as described in connection with the high corrugating speed, Japanese Laid Open Patent Application No. 6-23884 discloses a single facer machine wherein a liner web can be bond to a corrugated paper medium web under a reduced contact pressure in a nip formed by lower corrugating and pressure rolls. In the single facer of the 6-23884 application, the liner contacts the glued flute tips of the corrugated medium in the pressure nip formed by the pressure roll and the lower corrugating roll, with the liner web being tensioned by means of tensioning rolls disposed upstream and downstream of the lower corrugating roll in order to reduce the substantial contact pressure which would be otherwise required at the pressure nip.

However, it is not practical to apply the teachings of the 6-23884 application to the pair of upper and lower corrugating rolls defining the corrugating nip because high corrugating nip pressure is required at the nip defined between the upper and lower corrugating rolls whereas relatively low contact pressure is applied at the pressure nip between the lower corrugating roll and the pressure roll so as to provide an initial bond between the corrugated paper medium and the liner webs.

In practice, it is difficult to apply the teachings of the 6-23884 application to the upper pair of and lower corrugating rolls.

#### SUMMARY OF THE INVENTION

In view of the above-mentioned problem encountered with a

corrugating nip formed by upper and lower corrugating rolls, it is an object of the invention to provide a corrugation roll design for a corrugating machine which prevents failure of the fibers in a paper medium web when it is corrugated, thereby maintaining the required strength of the paper medium.

Also, in view of the above-mentioned problem encountered with a pressure nip formed by lower corrugating and pressure rolls, it is another object of the invention to provide a corrugating machine wherein a paper liner web is combined with glued flute tops of the paper medium in which the fibers therein are not cut, thereby preventing loss of strength of the corrugated cardboard.

Furthermore, it is another object of the invention to cost-effectively modify or retrofit the existing corrugating rolls in a manner so as to prevent the loss of the strength of the corrugated cardboard.

In order to attain these and other objects, the present invention provides a corrugating roll design for a corrugating machine comprising a pair of parallel, spaced apart, corrugating rolls which rotate in opposite directions on their respective rotational axes, the rotational axes of the corrugating rolls being spaced apart a predetermined distance, and each of the corrugating rolls being formed along its outer peripheral surface with longitudinally extending teeth with tooth tips and tooth roots, a paper medium to be corrugated adapted to be fed into a nip formed by the teeth of the corrugating rolls inter-engaging, and begin to be deformed as it moves into an actual corrugating impression zone in the nip where full engagement of the teeth takes place, thereby providing corrugations in the paper medium, characterized by depressions provided in the tops of the tooth tips

of at least one of the corrugating rolls and spaced apart a predetermined distance along the length of the roll, each of said depressions having a bottom surface which is located to establish a spacing between the bottom surface of the depression and the tooth root of the other corrugating roll at the actual corrugation impression zone in the nip, the above mentioned spacing being greater than the thickness of the medium.

According to one feature of the invention, the ratio of the sum total of the axial lengths of the depressions to the transverse dimension of the paper medium measured longitudinally of the above mentioned at least one of the corrugating roll is greater than a predetermined value.

Preferably, the bottom surface of each of the depressions is of a generally convex arc configuration in a direction toward the other corrugating roll with a radius of curvature greater than that of the tooth tips of said at least one of the corrugating rolls in a plane generally perpendicular to the longitudinal direction of the roll.

According to another feature of the invention, each of the depressions can be provided at its opposite sides with ramps extending in a divergent fashion from the bottom surface thereof to the top of the tooth tip of the above mentioned at least one of the corrugating rolls.

It is preferable for each of the tooth profiles of the corrugating rolls to be comprised of a combination of a plurality of arcs that are symmetrical with respect to a center line of the tooth tip, i.e., a line connecting the apex of the tooth tip and the rotational axis of the corrugating roll.

According to another feature of the invention, the

depressions of adjacent teeth or tooth tips of the above mentioned at least one of the corrugating rolls are offset from one another along the length of the corrugating roll.

Preferably, the depressions are disposed in a helical pattern along the peripheral surface of the corrugating roll.

The present invention also provides a corrugating machine comprising the pair of corrugating rolls as defined above, the corrugating rolls cooperating to provide a corrugated paper medium, gluing means for applying glue to the flute tops of the corrugated medium, and pressure means disposed downstream of the gluing means for cooperating with one of the corrugating rolls to compress the corrugated medium and a liner therebetween to bond them.

The present invention also provides a double facer comprising a pair of parallel, spaced apart, corrugating rolls which rotate in opposite directions on their respective rotational axes, the rotational axes of the corrugating rolls being spaced apart a predetermined distance, and each of the corrugating rolls being formed along its outer peripheral surface with longitudinally extending teeth with tooth tips and tooth roots, a paper medium to be corrugated adapted to be fed into a nip formed by the teeth of the corrugating rolls inter-engaging, and begin to be deformed as it moves into an actual corrugating impression zone in the nip where full engagement of the teeth takes place, thereby providing corrugations in the medium, each of said corrugating rolls having depressions provided in the tops of the tooth tips thereof and spaced apart a predetermined distance along the length of the roll, each of the depressions having a bottom surface which is located to establish a spacing

between the bottom surface of the depression and the tooth root of the other corrugating roll at the actual corrugation impression zone in the nip, the above mentioned spacing being greater than the thickness of the paper medium; first gluing means for  
5 applying glue to the flute tops of one of faces of the corrugated medium; first pressure means disposed downstream of the first gluing means for cooperating with the one of the corrugating rolls to compress the glued flute tops of the one face of the corrugated paper medium and a first liner therebetween to bond them;  
10 second gluing means disposed downstream of the first pressure means for applying glue or adhesive to the flute tops of the other face of the paper medium; and bonding means disposed downstream of the second gluing means for bonding a second liner web to the glued flute tops of the other face of the corrugated  
15 medium.

In an operation of the corrugating rolls according to the invention, a paper medium web is fed into the nip between the inter-engaging teeth of the upper and lower corrugating rolls rotating in opposite directions. The medium web begins to be  
20 deformed or folded as it moves into the corrugating impression zone in the nip where it is formed with corrugations or flutes.

More specifically, the upper and lower corrugating rolls are disposed parallel to each other at a predetermined center-to-center spacing. At the impression zone, the paper medium web  
25 is clamped or pinched between one of the tooth tips of one of the corrugating rolls and one of the tooth roots of the other corrugating roll at the impression zone under a predetermined nip load and thus is formed into its final fluted or corrugated configuration without any spring back occurring.

In view of that fact that depressions are provided in the tops of the tooth tips of at least one of the corrugating rolls and spaced apart a predetermined distance along the length of the roll, at the corrugating impression zone, some areas where the paper medium web is sandwiched between one of the tooth tips of one of the corrugating rolls and one of the tooth roots of the other corrugating roll as well as other areas where the paper medium web is sandwiched between the depressions on one of the tooth tips of one of the corrugating rolls and one of the tooth roots of the other corrugating roll are scattered along the length of the roll.

Since, as has already been stated, each depression of one of the corrugating rolls has a bottom surface which is located to establish a spacing between the bottom surface of the depression and one of the tooth roots of the other corrugating roll at the impression zone, substantially no corrugating nip pressure is exerted on the paper medium at said some areas, thereby preventing failure of the fibers in the paper medium web while at the same time, sufficient corrugating nip load is imposed on the paper medium web at said other areas.

The corrugated cardboard making machine having the corrugating rolls constructed in accordance with the invention prevents failure or cutting of the fibers in the paper medium during corrugating impression. As a result, the required strength of the medium web can be maintained. In addition, since the liner is combined with the glued paper medium in which the fibers remain intact by pressure means through the bonding of the surface of the liner with that of the paper medium, the required strength of the finished corrugated cardboard can be maintained.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a partial perspective view of a corrugating machine  
5 in accordance with one embodiment of the present invention,  
showing a paper medium web being corrugated by a pair of  
corrugating rolls;

FIG. 2 is a partial perspective view of a corrugating roll  
design according to the present invention;

10 FIG. 3 is a schematic representation of tooth tips and tooth  
roots of the two corrugating rolls of the invention with the  
corrugated paper medium web interposed therebetween;

FIG. 4 is a partial cross-sectional view taken in the  
direction of line 4-4 of FIG. 3;

15 FIG. 5 is a sectional view in schematic form of a  
conventional single facer;

FIG. 6 is an enlarged fragmentary view at the point where  
the teeth of the corrugating rolls intermesh;

20 FIG. 7 is a view similar to FIG. 3 showing the geometric  
relationship between the tooth tips and the tooth roots of two  
conventional corrugating rolls.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 One embodiment of the invention will now be described with  
reference to FIGS. 1 to 4 of the accompanying drawings in  
conjunction with, for example, a "single facer" corrugating  
machine for making a single faced corrugated cardboard or



paperboard .

The single facer 10 generally comprises a pair of corrugating rolls 12 for providing corrugations or flutes in a paper medium web A, a glue applicator (not shown in FIG. 1) for applying glue or adhesive to the tips of the corrugations of the medium A, and a pressure roll (not shown in FIG. 1) disposed downstream of the glue applicator for cooperating with one of the rolls to compress the corrugated medium web and a liner web therebetween to bond them and thus form a single faced corrugated cardboard product.

The components of the single facer according to the invention are identical to those of the conventional single facer as shown in FIG. 5 except for the design of the corrugating rolls 12 and thus require no further description thereof. Accordingly, the description given hereinafter will focus on the corrugating rolls 12.

As shown in FIG. 1, the corrugating rolls 12 consist of upper and lower corrugating rolls 12a and 12b. The rolls 12a and 12b are disposed parallel to each other at a predetermined center-to-center spacing and rotate in opposite directions about their respective rotational axes as shown by an arrow in FIG. 1. Each of the upper and lower corrugating rolls 12a and 12b has a tooth profile 24 defined by a plurality of tooth roots and tooth tips 20 and 22, respectively, which extend longitudinally along an outer peripheral surface 18 of the roll. The tooth profile 24 can be of any conventional shape, for example, in the form of involute curves. In this case, the number of teeth, circular pitch, whole depth module etc. can be selected as necessary to meet customer needs. It is preferable that each tooth profile 24 be composed of a combination of a plurality of arcs that are symmetrical with

respect to a center line 1 of the tooth profile, i.e., a line connecting the apex of the tooth tip 22 and the rotational axis of the corresponding corrugating roll. A paper medium web A to be corrugated is fed into a nip 25 formed by the inter-engaging teeth 5 24 of the corrugating rolls 12a and 12b, and begins to be deformed as it is moved into an actual corrugating impression zone P in the nip where full engagement of the teeth takes place, thereby providing corrugations in the medium.

As shown in FIGS. 2 and 3, one of the corrugating rolls, for example, the roll 12a has a series of depressions 28 provided in 10 tops 26 of the tooth tips 22 thereof and spaced apart a predetermined distance D along the length of the roll. Each of the depressions 28 has a bottom surface 32 which is located to establish a spacing between the bottom surface 32 of the depression and a bottom surface 30 of the tooth root 20 of the 15 other corrugating roll 12b at the actual corrugation impression zone P in the nip, which spacing is greater than the thickness of the medium web A. The ratio of the sum total of the axial lengths of the depressions 28 to the transverse dimension or 20 width of the medium web A measured longitudinally of the roll may be greater than a predetermined value.

As clearly shown in FIG. 3, in a plane generally perpendicular to the longitudinal direction of the roll, the bottom surface 32 of each of the depressions 28 is of generally convex arc 25 configuration as indicated at 31 in a direction toward the other corrugating roll 12b, and has a radius of curvature greater than that of the tooth tips 22 of the corrugating roll 12a. The configuration of each bottom surface 32 is such that it substantially follows the corrugated contour of the paper medium

between the top 26 of one of the tooth tips 22 of the corrugating roll 12a and the bottom 30 of one of the tooth roots 20 of the roll 12b at the corrugating impression zone P. Due to this, the medium being corrugated is positively prevented from being  
5 damaged or ruptured as a result of the medium being pressed between the top 26 of the tooth tip 22 of the roll 12a and the bottom 30 of the tooth root 20 of the roll 12b at the impression zone P.

As can be clearly seen in FIG. 4, each of the depressions 28  
10 can be provided at its opposite sides with ramps 34 extending in a divergent fashion from the bottom surface 32 to the top 26 of the tooth tip of the corrugating roll 12a. The radius of curvature and depth of the bottom surface, and the spacing D between the depressions can be selected depending on various impression  
15 conditions and the type of the paper medium.

It should be noted that the depressions of adjacent tooth tips  
22 of the corrugating roll 12a are offset from one another along the length of the corrugating roll and disposed in a helical pattern along the peripheral surface of the corrugating roll, as  
20 indicated in FIG. 1. As a result, advantageously, the corrugated medium web A has distributed across the width thereof portions that are not subject to the corrugating impression load and thus in which the fibers are not cut.

Before giving a description of the corrugating process  
25 performed by use of the corrugating machine according to the invention, it is believed that it is advisable to explain the manner by which the existing corrugating rolls may be modified in accordance with the teachings of the invention.

Firstly, the existing corrugating roll can be formed with a

series of depressions 28 in the tooth tips of the corrugations thereof, as can be seen in FIG. 1. To do this, a suitable cutting tool can be selected depending on the desired cross sectional configuration of the depressions. With the cutting tool engaging one of the corrugation tooth tips of the roll, the roll can be rotated about its axis to form a first depression in the tip. Then, the cutting tool is translated longitudinally a suitable distance corresponding to the desired axial offset. Then, the further rotation of the roll allows the cutting tool to cut a tooth tip adjacent to the already cut tooth tip to form a second depression which is offset from the first depression. Repetition of such an operation will provide depressions having a helical pattern in the existing corrugating roll in a less time-consuming manner. Alternatively, mutually spaced arrays of the depressions can be provided circumferentially around the peripheral surface of the roll. In this case, a plurality of spaced apart cutting tools can be used. With the cutting tools engaging one of the tooth tips of the roll, the roll can be rotated, thus resulting in the formation of the parallel arrays of the depressions in a short time.

In the corrugating process, a paper medium A is fed into the nip 25 between the inter-engaging teeth of the counter-rotating upper and lower corrugating rolls 12a and 12b and begins to be deformed or folded as it moves into the corrugating impression zone P in the nip where it is pinched between the tooth tips 22 and the tooth roots 20 to be formed into a final corrugated configuration as shown in FIG. 1.

More specifically, the upper and lower corrugating rolls 12a and 12b are disposed parallel to each other at a predetermined center-to-center spacing. At the impression zone P, the medium

A is clamped between one of the tooth tips 22 of one of the corrugating rolls and one of the tooth roots 20 of the other corrugating roll under the predetermined nip pressure and thus is formed into its final corrugated configuration without any resulting spring back occurring.

In view of the above fact that depressions 28 are provided in the tops 26 of the tooth tips 22 of one of the corrugating rolls 12 and spaced apart the predetermined distance along the length of the roll, at the corrugating impression zone P, some areas where the paper medium web is sandwiched between one of the tooth tips of one of the corrugating rolls and one of the tooth roots of the other corrugating roll as well as other areas where the paper medium web is sandwiched between the depressions on one of the tooth tips of one of the corrugating rolls and one of the tooth roots of the other corrugating roll are scattered along the length of the roll.

Since, as has already been stated, each depression 28 of one of the corrugating rolls has a bottom surface 32 which is located to establish a spacing between the bottom surface 32 of the depression and the tooth root 20 of the other corrugating roll at the impression zone P, substantially no corrugating nip pressure is exerted on the paper medium A at some area where the paper medium web is sandwiched between one of the tooth tips of one of the corrugating rolls and one of the tooth roots of the other corrugating roll, thereby preventing failure of the fibers in the paper medium web while at the same time, sufficient corrugating nip load is imposed on the paper medium web A at other areas where the paper medium web is sandwiched between the depressions on one of the tooth tips of one of the corrugating rolls

and one of the tooth roots of the other corrugating roll. It also should be noted that the divergently extending ramps 34 of each of the depressions 28 which define transitions with blunt or obtuse edges between the bottom surface 32 and the top 26 of the tooth tip 22 serve to avoid damage to or possibly rupture of the paper medium web A which would otherwise be incurred.

The corrugated medium is glued by the glue applicator in the usual manner. The pressure roll cooperates with the lower corrugating roll 12b to bond the glued corrugated medium web A to the liner web B to produce a single faced corrugated paperboard product.

The single facer 10 having the corrugating rolls 12 constructed in accordance with the teachings of the invention prevents failure of the fibers in the paper medium A during corrugating impression. As a result, reduction of the strength of the medium web can be avoided. In addition, since the liner web is combined with the glued paper medium web having the portions in which the fibers remaining intact by pressure means through bonding of the surface of the liner to that of the paper medium, the required strength of the finished corrugated cardboard can be maintained.

While specific embodiments of the invention have been described in detail, various modifications and alternations thereto will occur to those skilled in the art within the scope of the present inventive concepts which are delineated by the following claims. More specifically, it will be understood that, while the single faced corrugated cardboard is referred to in this specification, the invention could be applied a double faced corrugated cardboard. In this case, the depressions can be

provided in each roll of the pair of corrugating rolls of the single  
facer as shown in FIG. 1. The double faced corrugated cardboard  
is formed by applying glue to the face of the corrugated paper  
medium opposite a first liner thereon and bonding a second liner  
5 to that face of the medium. Such bonding of the second liner can  
be often accomplished in such a manner that the glue may  
penetrate into both paper the medium and the second liner. The  
depressions in both of the upper and lower corrugating rolls will  
serve to avoid reduction of the required strength of the double  
10 faced corrugated cardboard because cutting of the fibers in the  
tips and valleys of the corrugated paper medium can be prevented.  
Also, the depressions may be provided in selected tooth tips of the  
roll rather than all of the tooth tips. The number of depressions  
and the surface area of the depression bottom can be selected  
15 depending on the desired type of flute, the type of the medium,  
the impression conditions, etc..

As has already been stated, the use of the corrugating rolls  
according to the invention results in preventing failure of the  
fibers in a paper medium when it is corrugated, thereby  
20 maintaining the required strength of the medium.

In the corrugated cardboard making machine according to  
the invention, a paper liner is combined with glued flute tops of  
the paper medium in which the fibers therein are not cut, thereby  
preventing loss of the required strength of the corrugated  
25 cardboard.

Additionally, the existing corrugating rolls can be modified  
at a low cost so as to prevent loss of the strength of the corrugated  
cardboard.

What is claimed is:

1. A corrugating roll design for a corrugating machine comprising a pair of parallel, spaced apart, corrugating rolls which rotate in opposite directions on their respective rotational  
5 axes, the rotational axes of the corrugating rolls being spaced apart a predetermined distance, and each of the corrugating rolls being formed along its outer peripheral surface with longitudinally extending teeth with tooth tips and tooth roots, a paper medium to be corrugated adapted to be fed into a nip  
10 formed by the teeth of the corrugating rolls inter-engaging, and begin to be deformed as it moves into an actual corrugating impression zone in the nip where full engagement of the teeth takes place, thereby providing corrugations in the paper medium, characterized by depressions provided in the tops of the tooth tips,  
15 of at least one of the corrugating rolls and spaced apart a predetermined distance along the length of the roll, each of said depressions having a bottom surface which is located to establish a spacing between the bottom surface of the depression and the tooth root of the other corrugating roll at said actual corrugation  
20 impression zone in the nip, said spacing being greater than the thickness of the medium.

2. A corrugating roll design according to claim 1, wherein, the ratio of the sum total of the axial lengths of said depressions to the transverse dimension of the paper medium measured  
25 longitudinally of said at least one of the corrugating roll is greater than a predetermined value.

3. A corrugating roll design according to claim 1, wherein, said bottom surface of each of said depressions is of a generally convex arc configuration in a direction toward the other



corrugating roll with a radius of curvature greater than that of the tooth tips of said at least one of the corrugating rolls in a plane generally perpendicular to the longitudinal direction of the roll.

5           4. A corrugating roll design according to claim 1, each of the depressions is provided at its opposite sides with ramps extending in a divergent fashion from the bottom surface thereof to the top of the tooth tip of said at least one of the corrugating rolls.

10           5. A corrugating roll design according to claim 1, each of the tooth profiles of the corrugating rolls comprising a combination of a plurality of arcs that are symmetrical with respect to a line connecting the apex of the tooth tip and the rotational axis of the corrugating roll.

15           6. A corrugating roll design according to claim 1, said depressions of adjacent tooth tips of said at least one of the corrugating rolls are offset from one another along the length of the corrugating roll.

20           7. A corrugating roll design according to claim 5, said depressions are disposed in a helical pattern along the peripheral surface of the corrugating roll.

25           8. A corrugating machine comprising the pair of corrugating rolls according to claim 1, said corrugating rolls cooperating to provided a corrugated paper medium, gluing means for applying glue to the flute tops of the corrugated medium, and pressure means disposed downstream of the gluing means for cooperating with one of the corrugating rolls to compress the corrugated medium and a liner therebetween to bond them.

          9. A double facer corrugating machine comprising a pair of parallel, spaced apart, corrugating rolls which rotate in opposite

directions on their respective rotational axes, said rotational axes of the corrugating rolls being spaced apart a predetermined distance, and each of said corrugating rolls being formed along its outer peripheral surface with longitudinally extending teeth with tooth tips and tooth roots, a paper medium to be corrugated adapted to be fed into a nip formed by the teeth of the corrugating rolls inter-engaging, and begin to be deformed as it moves into an actual corrugating impression zone in the nip where full engagement of the teeth takes place, thereby providing corrugations in the paper medium, each of said corrugating rolls having depressions provided in the tops of the tooth tips thereof and spaced apart a predetermined distance along the length of the roll, each of said depressions having a bottom surface which is located to establish a spacing between said bottom surface of the depression and the tooth root of the other corrugating roll at said actual corrugation impression zone in the nip, said spacing being greater than the thickness of the medium; first gluing means for applying glue to the flute tops of one of faces of the corrugated medium; first pressure means disposed downstream of the first gluing means for cooperating with the one of the corrugating rolls to compress the glued flute tops of the one face of the corrugated medium and a first liner therebetween to bond them; second gluing means disposed downstream of the first pressure means for applying glue to the flute tops of the other face of the paper medium; and bonding means disposed downstream of the second gluing means for bonding a second liner web to the glued flute tops of the other face of the corrugated medium.

## ABSTRACT

The present invention provides a corrugating roll design for either a single facer or double facer that serves to prevent cutting of the fibers in a paper medium, thereby maintaining the required strength of the medium. A corrugating roll design for a corrugating machine comprises a pair of parallel, spaced apart, corrugating rolls which rotate in opposite directions on their respective rotational axes, the rotational axes of the corrugating rolls being spaced apart a predetermined distance, and each of the corrugating rolls being formed along its outer peripheral surface with longitudinally extending teeth with tooth tips and tooth roots; a paper medium to be corrugated adapted to be fed into a nip formed by the teeth of the corrugating rolls interengaging, and begin to be deformed as it moves into an actual corrugating impression zone in the nip where full engagement of the teeth takes place, thereby providing corrugations in the paper medium. Depressions are provided in the tops of the tooth tips of at least one of the corrugating rolls and spaced apart a predetermined distance along the length of the roll. Each of the depressions has a bottom surface which is located to establish a spacing between the bottom surface of the depression and the tooth root of the other corrugating roll at the actual corrugation impression zone in the nip, which spacing is greater than the thickness of the paper medium.

FIG. 1

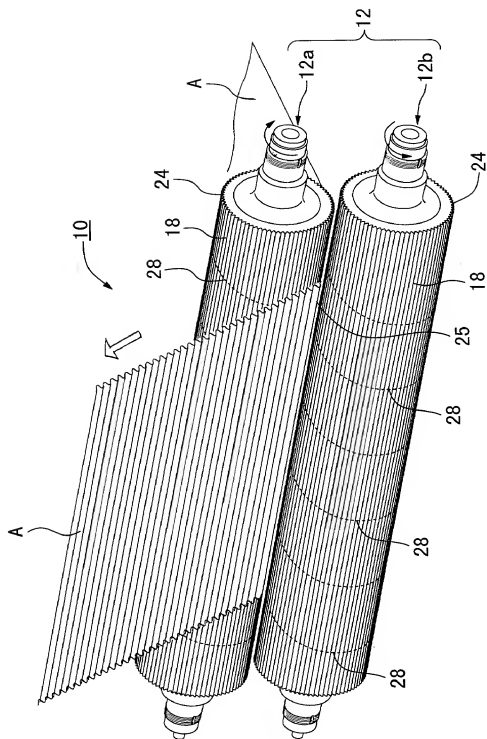


FIG. 2

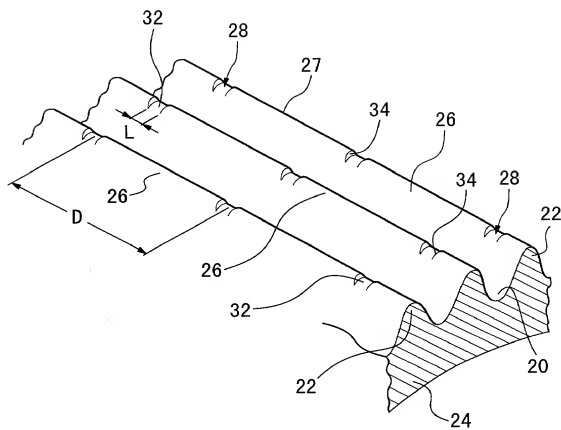


FIG. 3

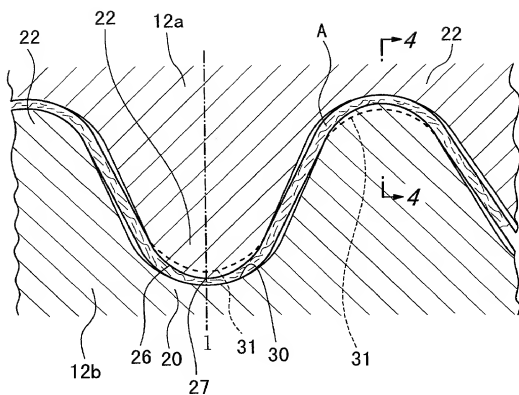
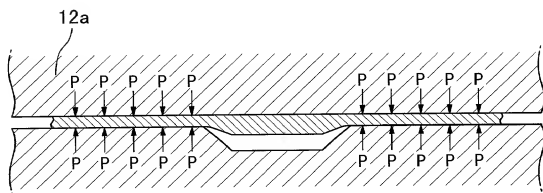


FIG. 4



**FIG. 5**  
**(PRIOR ART)**

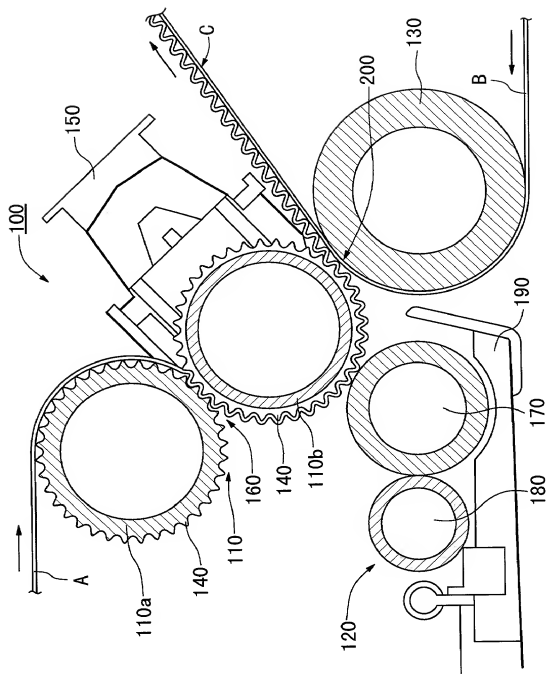




FIG. 6  
(PRIOR ART)


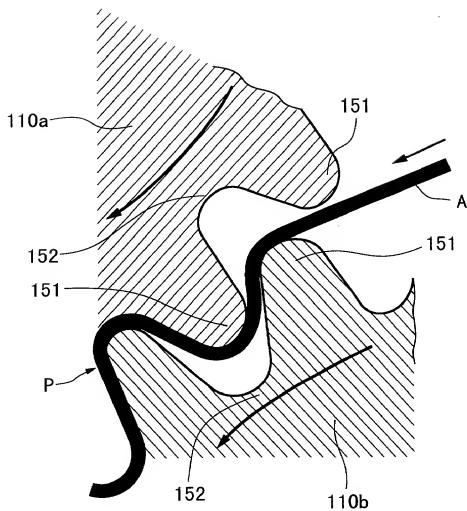


FIG. 7  
(PRIOR ART)

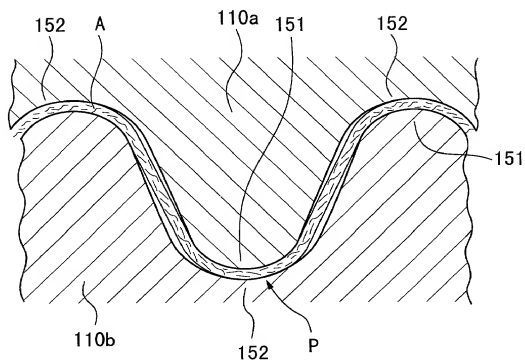

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CORRUGATING MACHINE AND CORRUGATING

ROLL DESIGN FOR THE SAME

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

## Prior Foreign Application(s)

外国での先行出願 228410/1999	Japan
(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

私、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外特許出願提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed  
優先権主張なし

12/08/1999

(Day/Month/Year Filed)  
(出願年月日)

☐

(Day/Month/Year Filed)  
(出願年月日)

☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)
(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Lawrence Rosenthal, Reg. No. 24,377  
Steven B. Pokotilow, Reg. No. 26,405  
Howard M. Gitten, Reg. No. 32,138  
STROOCK & STROOCK & LAVAN LLP  
180 Maiden Lane  
New York, New York 10038

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STROOCK & STROOCK & LAVAN LLP  
(212) 806-5400

唯一または第一発明者名

Full name of sole or first inventor

Etsuro ABE

発明者の署名

日付

Inventor's signature

Date

Etsuro Abe

August 8, 2000

住所

Residence

Komaki-shi, Aichi-ken, JAPAN

国籍

Citizenship

JAPAN

私書箱

Post Office Address

No. 1-7-4, Momocgaoka, Komaki-shi,

Aichi-ken, JAPAN

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)